


JV080025

**Stainless Steel Body & Disc
PTFE Seat
Spring-Loaded
Check (Non-Return) Valve
Multi-Flange Wafer Type**

15mm - 80mm
PN6/10/16/25/40, ANSI150 & ANSI300
100mm
PN10/16/25/40, ANSI150 & ANSI300

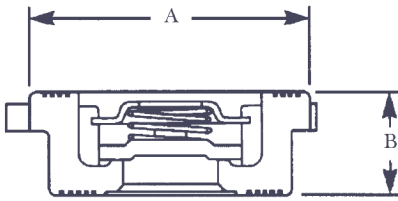

An economical spring-loaded non-return valve with a stainless steel body and disc.

It can be fitted in the horizontal position or in the vertical position with the flow going upwards.

Approvals, Features & Benefits

- Lightweight & economic
- Spring loaded
- Suitable for upward & horizontal flow
- Space saving

Pressure & Temperature

Pressure range:-
PN52 Rated

Temperature Range:-
0°C to 200°C

DN	15	20	25	32	40	50	65	80	100
A	43	48	58	68	75	94	113	129	159
B	17	20	22	28	32	40	46	50	60
Cracking Press. (mBar) ▲	25	25	25	27	28	30	30	25	21
Cracking Press. (mBar) ►	23	23	23	25	23	24	24	19	15
Cracking Press. (mBar) ▼	21	21	21	22	18	18	18	13	9
Weight Kg	0.11	0.18	0.26	0.40	0.55	1.00	1.50	2.00	3.20

MATERIALS

Body	Stainless Steel (AISI 316)
Disc	Stainless Steel (AISI 316L)
Seat	PTFE
Spring	Stainless Steel (AISI 316)

HEADLOSS (Water @20°C - Horizontal Flow)

