


RK44

**Bronze Body
Stainless Steel Disc
Metal Seated
Spring-Loaded
Check (Non-Return) Valve
Multi-Flange Wafer Type**

PN6/10/16, BST D, E & F, ANSI125 & ANSI150

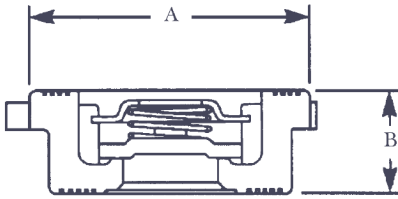

GESTRA®

The Gestra RK44 check (non-return) valve is suitable for use on a wide range of fluids for applications in process lines, hot water systems, steam and condensate systems etc. It can be fitted in the horizontal position or in the vertical position with the flow going upwards.

Approvals, Features & Benefits

- Short overall length
- EN 558 part 1, table 11, series 49
- Robustly manufactured
- Spring loaded
- Suitable for upward & horizontal flow
- Space saving

Pressure & Temperature

Pressure range:-
PN16 Rated

Temperature Range:-
-200°C to 230°C

| SIZE | 15 | 20 | 25 | 32 | 40 | 50 | 65 | 80 | 100 |
|------------------|-----|-----|------|-----|------|-----|-----|-----|-----|
| A | 42 | 49 | 58 | 74 | 84 | 97 | 117 | 132 | 152 |
| B | 16 | 19 | 22 | 28 | 31.5 | 40 | 46 | 50 | 60 |
| Weight Kg | 0.1 | 0.2 | 0.25 | 0.5 | 0.7 | 1.1 | 1.4 | 2 | 3.2 |

MATERIALS

| | |
|------------------------|-----------------------|
| Body | Bronze |
| Disc | Stainless Steel (316) |
| Spring Retainer | Stainless Steel (316) |
| Spring | Stainless Steel (316) |