

**JV090024**  
Stainless Steel  
2-Piece Ball Valve  
c/w Operating Lever  
BSPB Threaded  
Male x Female



A versatile and robust two-piece stainless steel ball valve with male x female connections suitable for a wide range of isolation applications.

The quarter turn operation in conjunction with the PTFE seats provides fast positive isolation.

This valve can be locked in either the open or closed position.

**Approvals, Features & Benefits**

- PTFE seats
- Full bore
- Lever operated
- Lockable in the open & closed position
- Blow-out proof stem

**Pressure & Temperature**


Pressure range :-  
PN63 rated

Temperature range\*:-  
-10°C to 180°C

\* Dependent on pressure

BSPB	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
<b>A</b>	58	59	68	78	99	112.4	114	151.7
<b>B</b>	99	102	102	122	157	135	191	165
<b>C</b>	51	51	53	59	73	78	91	99
<b>D</b>	11.6	12.7	15	20	25	32	38	50
<b>D1</b>	7	8.5	12.5	17.5	23.6	30.8	36.6	47.5
<b>E</b>	12.6	13.2	16.7	18.2	21	23.5	23.5	27.8
<b>Weight Kg</b>	0.3	0.3	0.35	0.58	1.04	1.54	2.3	3.8

MATERIALS	
<b>Body</b>	Stainless Steel (CF8M)
<b>Ball</b>	Stainless Steel (CF8M)
<b>Stem</b>	Stainless Steel (316)
<b>Seats</b>	15% R-PTFE
<b>Lever</b>	Stainless Steel (304)

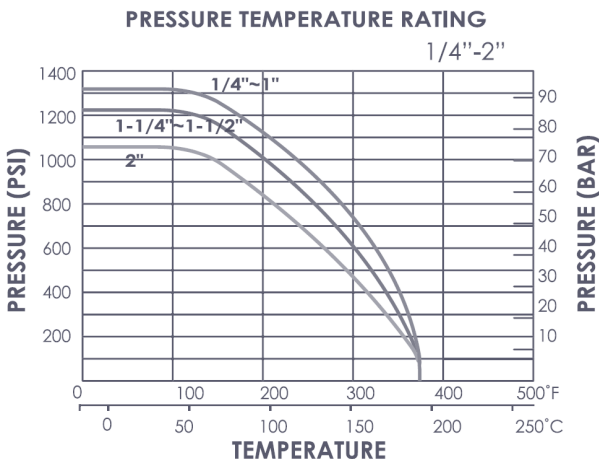

**Important - Dimensions may vary, if critical please contact sales for confirmation**