


JV210000

Aluminium Cased V Shaped Thermometers

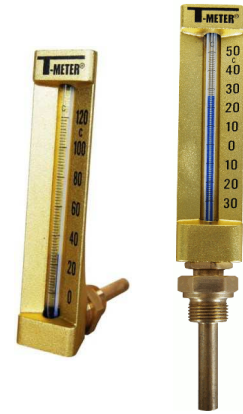

A economical alternative to the Sika range of industrial and marine "V shaped" direct mounting thermometers.

The casing is "V shaped", gold-coloured anodised aluminium. They are adjustable to any desired viewing position and locked by a brass nut.

Approvals, Features & Benefits

- Accuracy class 2.5%
- Industrial & marine duty
- Clearly marked for easy reading
- No moving parts

Pressure & Temperature


Pressure rating:-
PN16

Temperature range:-
See table below

Part No.	Type	H	L1	P	G (male)	Available Ranges	Weight Kg
JV210001	Straight	150	63	Ø10	1/2" BSP	-30 to +50°C • 0 to 120°C	0.26
JV210002	Angled	150	63	Ø10	1/2" BSP	-30 to +50°C • 0 to 120°C	0.26
JV210003	Straight	150	100	Ø10	1/2" BSP	-30 to +50°C • 0 to 120°C	0.28
JV210004	Angled	150	100	Ø10	1/2" BSP	-30 to +50°C • 0 to 120°C	0.28
JV210005	Straight	200	63	Ø10	1/2" BSP	-30 to +50°C • 0 to 120°C • 0 to 200°C • 0 to 300°C	0.31
JV210006	Angled	200	63	Ø10	1/2" BSP	-30 to +50°C • 0 to 120°C • 0 to 200°C • 0 to 300°C	0.31
JV210007	Straight	200	100	Ø10	1/2" BSP	-30 to +50°C • 0 to 120°C • 0 to 200°C • 0 to 300°C	0.33
JV210008	Angled	200	100	Ø10	1/2" BSP	-30 to +50°C • 0 to 120°C • 0 to 200°C • 0 to 300°C	0.33

MATERIALS

Casing	Aluminium (Gold Anodized)
Thermometer Insert	Prismatic Glass Tube Scale Engraved
Thermometer Filling	Spirit (Blue Colour)
Immersion Tube	Brass (up to 0 to 200°C) Stainless Steel 304 (300°C)



	L1	L2	Ø	Weight Kg
JV210009 - 63mm x 1/2" BSP Brass Thermowells	50	75	14	0.13
JV210009 - 100mm x 1/2" BSP Brass Thermowells	86	110	14	0.14