


AIR VENTS

5020

WRAS APPROVED AUTOMATIC AIR VENT

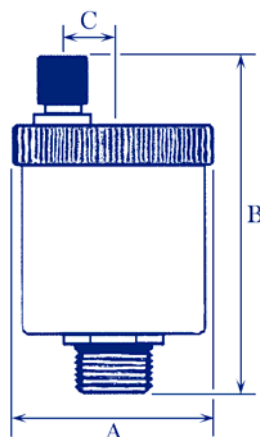

Part No. 5020

BRASS BODY WITH BSP THREADED CONNECTIONS

SIZE	DN10	DN15	DN20	DN25
INLET (BSP)	3/8	1/2	3/4	1
DISCHARGE (BSP)	1/8	1/8	1/8	1/8
A	48	48	48	48
B	79	79	86	86
C	17	17	17	17

These economical automatic air vent valves are designed to remove the air that accumulates in heating and air conditioning systems without the need for manual intervention. The accumulation of air bubbles in the valve body causes the float to drop so that the air vent opens.

These vents should be installed in the vertical position, on the air separator, on manifolds, on riser pipes and generally in parts of the system where a concentration of air pockets is to be expected.

Features & Benefits

- WRAS approved.
- Compact & lightweight.
- Reliable performance.
- Simple float operation.

Pressure & Temperature

Pressure range:-

Up to 2.5 bar.

Temperature Range:-

0 to 120°C.

MATERIALS

Body	Brass
Cover	Brass
Float	Polypropylene
Lever Stem	Stainless Steel
Spring	Stainless Steel
Seals	EPDM