


BALL VALVES

BV90

BRITISH GAS & WRAS APPROVED BALL VALVE

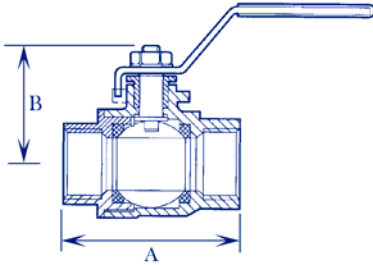

Part No. BV90

FULL BORE, BRASS BODY WITH BSP THREADED CONNECTIONS

BSP	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4
A	45	45	59	69	83	94	102	124	148	171	206
B	48	48	55	66	70	83	93	102	143	153	187

The economical and versatile BV90 Nickel plated, brass bodied full bore ball valves are especially suited for gas and liquid applications.

The quarter turn operation in conjunction with the PTFE seats provides fast positive isolation.

Full bore construction minimises headloss and the hard chrome plated ball offers excellent wear resistance.

These valves are supplied with female ends and are lever operated as standard but other options are available.

Features & Benefits

- British Gas Approved.
- EN331:1995.
- Gas families 1st, 2nd, 3rd.
- WRAS Approved.
- Nickel plated body.
- Full bore.
- Lever operated.

Pressure & Temperature

1/4" - 1/2" PN64 Rated
3/4" - 2 1/2" PN40 Rated
3" PN32 Rated
4" PN25 Rated

Gas temperature:-
-20°C to 70°C.

Fluid temperature:-
-20°C to 150°C.

MATERIALS

Body	Brass Nickel Plated
Ball	Brass Hard Chrome Plated
Seats	P.T.F.E.
Lever	Plated Steel

BV90MF.BL



AVAILABLE OPTIONS		
MODEL	CONNECTIONS	OPERATION
BV90	Female x Female	Lever
BV90.BL	Female x Female	Butterfly Lever
BV90MF	Male x Female	Lever
BV90MF.BL	Male x Female	Butterfly Lever

BV90.BL

