


MUELLER® SUPER CENTURION® 250

Fire Hydrant Parts List

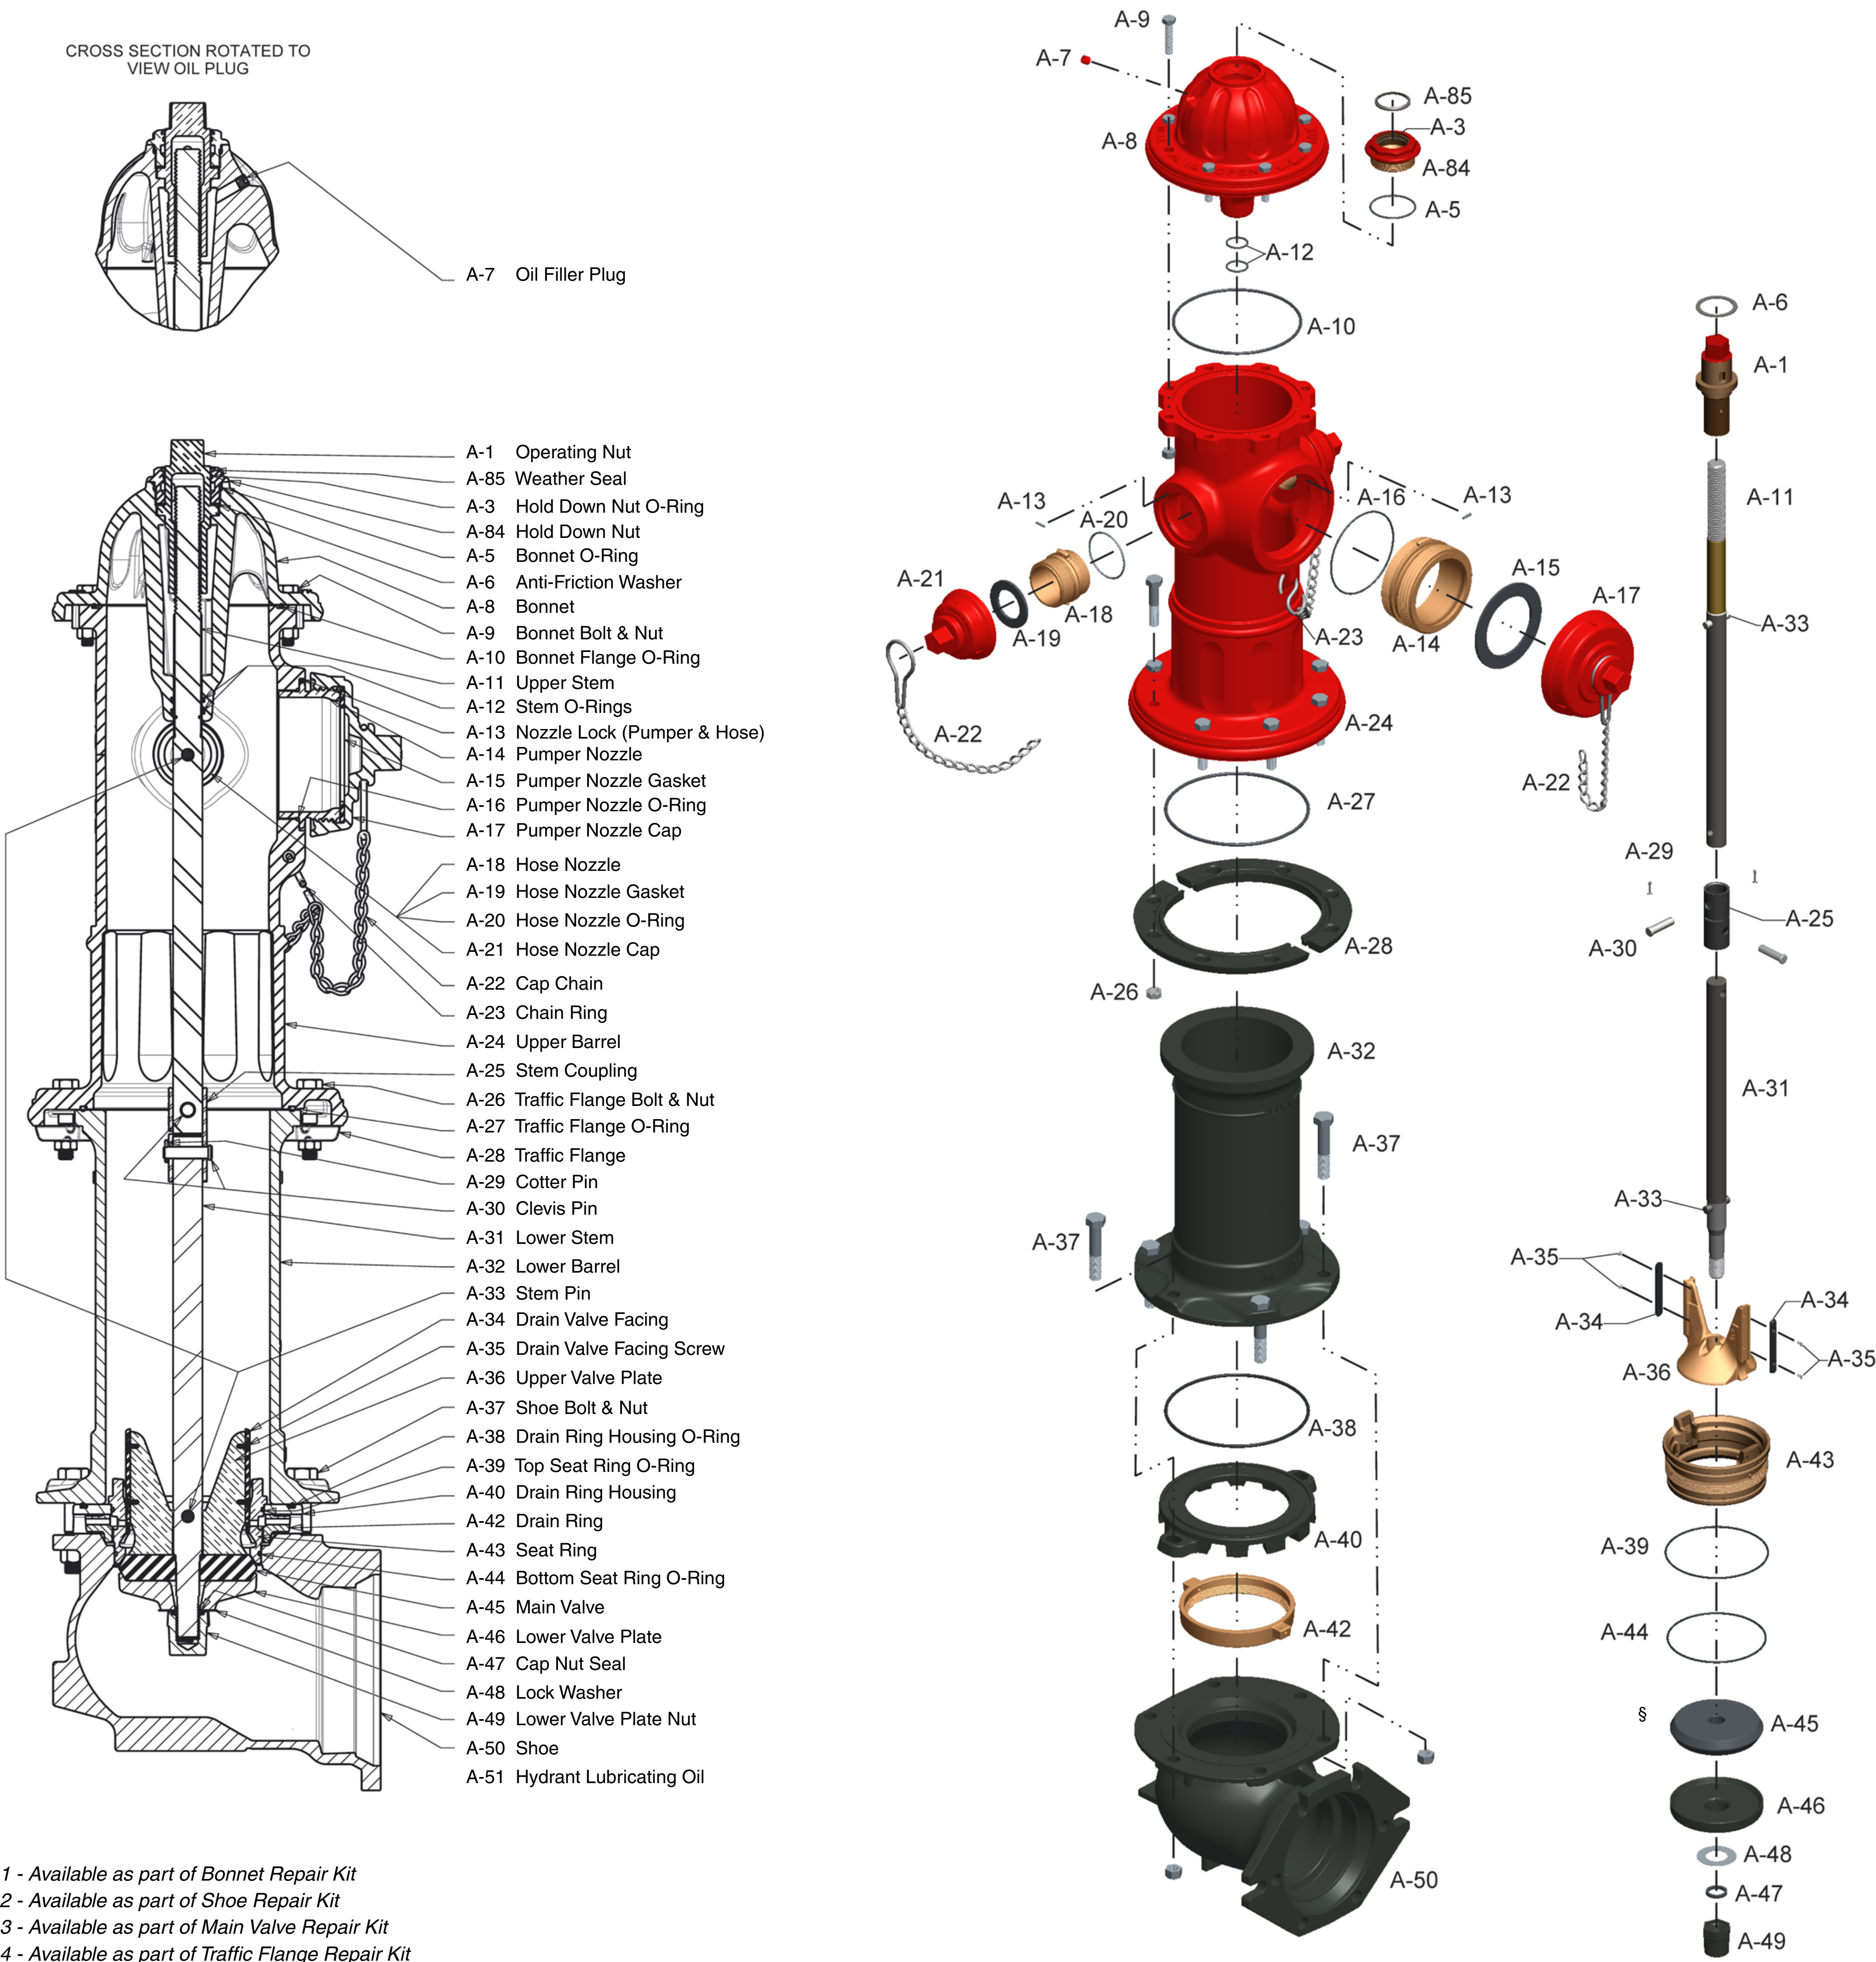

1 - Available as part of Bonnet Repair Kit
2 - Available as part of Shoe Repair Kit
3 - Available as part of Main Valve Repair Kit
4 - Available as part of Traffic Flange Repair Kit

TO ORDER PARTS, SPECIFY THE FOLLOWING:


Quantity, part number and name, size and catalog number of hydrant, direction of opening, depth of bury, and date (year) cast on hydrant.

QR tags provide access to hydrant data and documentation.



Mueller Co., LLC
1200 Abernathy Rd., Suite 1200
Atlanta, GA 30328
www.muellercompany.com


Toll Free: 1.800.423.1323
Canada: 1.705.719.9965
moreinfo@muellercompany.com



BRASS SLEEVE – Protects O-rings from being damaged by stems threads when removing the housing from the upper stem for any reason.

A-367 - 7" Brass Sleeve
A-368 - 14" Brass Sleeve

To order specify - Quantity and Catalog Number.



OPERATING WRENCH – Used to operate nozzle caps, pin type and lug type hose couplings, hydrant operating nut and hold-down nut.

A-311 Operating Wrench

To order specify - Quantity, Catalog Number, Size and Shape of Operating Nut.



A-359-00

SEAT WRENCH – Universal fit, used to remove main valve and seat ring from bonnet level or ground line. Wrench self-centers on barrel flange. Used on Centurion models (Spin-In, Super 200 and 250).

A-359-00 Seat Wrench

To order specify - Quantity, Catalog Number, Size and Shape of Operating Nut. For Modern Centurion use A-359.



A-359

SEAT WRENCH ---

Universal fit, used to remove main valve and seat ring from bonnet level or ground line. Wrench self-centers on barrel flange. Used on all Centurion, Modern and 107® Hydrants.

A-359 Seat Wrench

To order specify - Quantity and Catalog Number.



NOZZLE WRENCH – Used to remove and install hose and pumper nozzles. Separate wrenches for each nozzle size - 2-1/2", 3", 4"*.

A-316 Nozzle Wrench

To order specify - Quantity, Catalog Number, and Size.

*4" wrench also fits 4-1/2" nozzle.



HYDRANT LUBRICATING OIL

– This special all weather oil flows freely through a temperature range of -60° F to +150° F. The container contains 10.5 oz. of oil. FDA approved.

A-51 Lubricating Oil

To order specify - Quantity and Catalog Number.