


## JV080021

**Stainless Steel Body & Disc  
Metal Seat  
Spring-Loaded  
Check (Non-Return) Valve  
Multi-Flange Wafer Type  
PN10/16/25/40, ANSI150 & ANSI300**

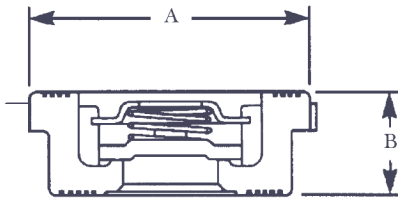

An economical spring-loaded non-return valve with a stainless steel body and disc.

It can be fitted in the horizontal position or in the vertical position with the flow going upwards.

### Approvals, Features & Benefits

- Lightweight & economic
- Spring loaded
- Suitable for upward & horizontal flow
- Space saving

### Pressure & Temperature

Pressure range:-  
PN40 Rated

Temperature Range:-  
0°C to 200°C

DN	15	20	25	32	40	50	65	80	100
<b>A</b>	39	46	54	70	81	94	113	132	150
<b>B</b>	16	19	22	28	32	40	46	50	60
<b>Cracking Pressure (Bar)</b>	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
<b>Weight Kg</b>	0.10	0.14	0.22	0.39	0.54	0.77	1.25	1.90	2.80

### MATERIALS

<b>Body</b>	Stainless Steel (CF8M)
<b>Disc</b>	Stainless Steel (CF8M)
<b>Seat</b>	Metal
<b>Spring &amp; Spring Cover</b>	Stainless Steel (AISI 316)

### Pressure / Temperature

