


BALL VALVES

BV100

WRAS APPROVED BALL VALVE

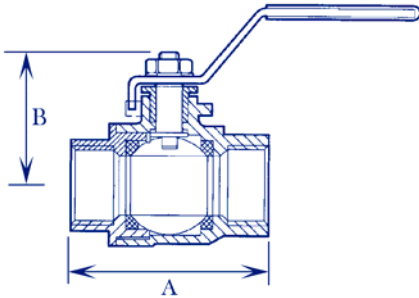

Part No. BV100

**FULL BORE, DZR BRASS BODY WITH BSP THREADED CONNECTIONS
SUITABLE FOR SEA WATER DUTY**

BSP	1/4	3/8	1/2	3/4	1	1 1/4	1 1/2	2
A	49	50	61	70	84	98	108	130
B	37	37	44	52	56	63	69	83

The versatile BV100 DZR brass bodied full bore ball valves are especially suited for water applications.

The quarter turn operation in conjunction with the PTFE seats provides fast positive isolation.

Full bore construction minimises headloss and the hard chrome plated ball offers excellent wear resistance.

The material construction of these valves makes them particularly suited to marine and seawater applications.

Features & Benefits

- WRAS Approved.
- Particularly suited to marine and seawater applications.
- Suitable for various duties.
- DZR Brass body.
- Full bore.
- Lever operated.

Pressure & Temperature

PN25 Rated

Gas temperature:-
-20°C to 60°C.

Fluid temperature:-
-15°C to 120°C.

Also Available

Compression ends 15mm to 28mm.
Butterfly Lever.
Extension stem.

MATERIALS

Body	DZR Brass
Ball	DZR Brass Hard Chrome Plated
Seats	P.T.F.E.
Lever	Plated Steel